

4 and 6 Exposed Dipole Arrays



BD2-6G



BD2-9G



DESCRIPTION

- High quality aluminium construction.
- Optimum performance at all band.
- Heavy duty folded dipoles.
- U-Bolts, clamps and splitter included in price.
- Standard female connector N.
- Polyethylene moulded balun.

SPECIFICATIONS

- Polarization Vertical
- Impedance 50 Ohms
- Max. power 300 W
- S.W.R. < 1,5
- Mounting 35-65 mm pipe diameter





DESCRIPCION



- Fabricados en aluminio protegido contra la corrosión.
- Optimo rendimiento en gran ancho de banda.
- Dipolo plegado de gran robustez.
- Conector standard N hembra.
- Balun protegido con Polietileno inyectado.
- Herrajes y splitter incluidos en P.V.P.

ESPECIFICACIONES

- Polarización Vertical
- Impedancia 50 Ohms
- Potencia Máx. 300 Watos
- S.W.R. < 1,5
- Montaje sobre mástil de 35-65 mm de diámetro

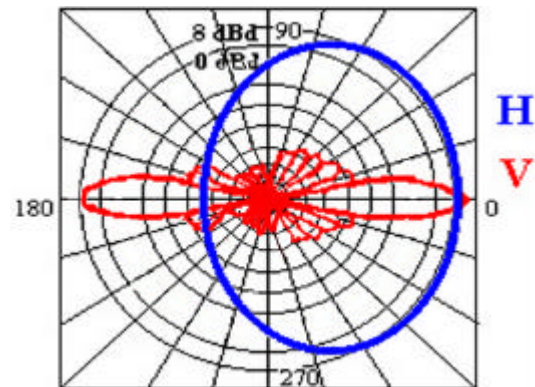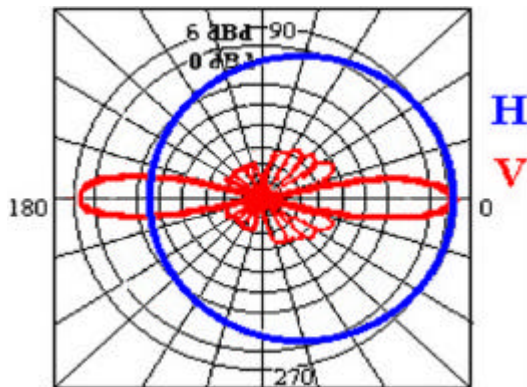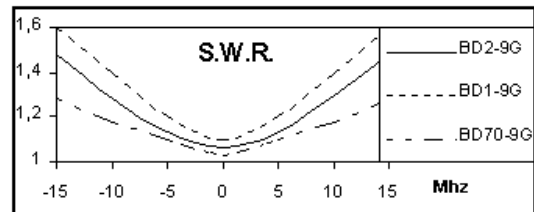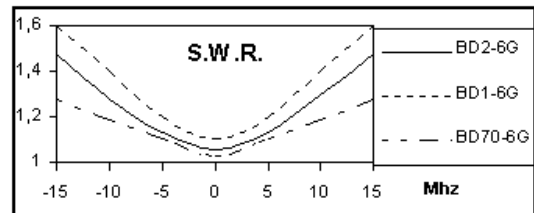

Models	Frequency (MHz)	Bandwidth (MHz)	Length (m)	Gain (dBd)	Weight (kg)	Price (Euros)
BD2 - 6G	144-174	30	6,5	6	23	See price list
BD1 - 6G	220-240	20	4,8	6	21	See price list
BD70 - 6G	375-512	75	2,7	6	16	See price list
BD2 - 9G	144-174	30	8,3	9	33	See price list
BD1 - 9G	220-240	20	6,2	9	30	See price list
BD70 - 9G	375-512	75	3,4	9	24	See price list