


BASE CK



CK-2 M,1 M

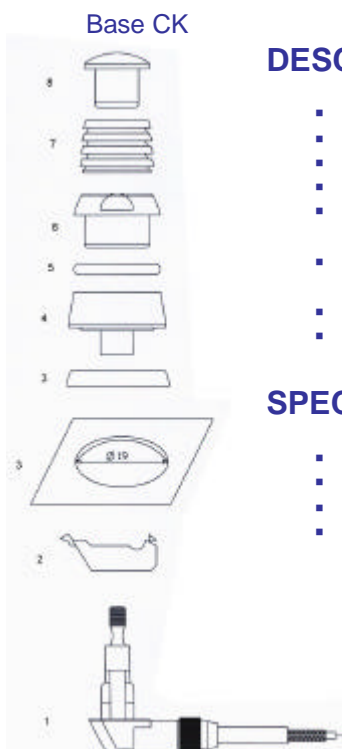

Base CK

DESCRIPTION



- High efficiency and performance radiator.
- CK-70 of steel wire with dipping.
- CK-70 G, 17-7 PH Conical black stainless steel whip.
- CK-9, brass black chrome plated.
- CK-9G, 17-7 PH Conical black stainless steel whip and coil PVC moulded.
- Stocked ABS and ZAMAC Base, supplied with 5 m. of RG-58.
- Spring optional.
- Install from inside of the car.

SPECIFICATIONS

- Polarization Vertical
- Radiation Omnidirectional
- Impedance 50 Ohms
- Max. Power 100 W

DESCRIPCION



- Varilla radiante cónica de acero inoxidable, 17-7 PH, cromada en negro, de alta eficiencia.
- CK-70 con cable de acero, recubierto en dipping o termoretráctil.
- CK-9, latón cromado
- CK-9G, arilla radiante cónica de acero inoxidable, 17-7 PH, cromada en negro, y bobina, encapsulado en PVC
- Base de ABS y ZAMAC, suministrada con 5m. de cable RG-58.
- Montaje de la antena desde el interior del vehículo.
- Opción muelle (M), que da cierta flexibilidad a la antena.
- Posibilidad de ajuste, bajo pedido.

ESPECIFICACIONES

- Polarización Vertical
- Radiación Omnidireccional
- Impedancia 50 Ohms
- Potencia max. 100 Wa





Elementos de la base CM

- Pieza Base
- Chapa Acero Inoxidable
- Coma base
- Pieza Centrada
- Junta Torica
- Tuerca
- Cono estirado
- Tapón Final

Models	Frequency (MHz)	Length (cm)	Type	Gain (dbd)	Weight (gr)	Price (Euros)
CK - 2	134-175	51	1/4	< 0	300	Price list
CK - 1	220-240	35	1/4	< 0	280	Price list
CK - 2M	134-175	56	1/4	< 0	320	Price list
CK - 1M	220-240	39	1/4	< 0	320	Price list
CK - 9	870-960	6	1/4	0	260	Price list
CK - 9G	870-960	28	3/4	4	280	Price list
CK - 9G2	Base CK, varillas CK-9 y CK-9G					Price list
CK - 70	375-512	19	1/4	0	260	Price list
CK - 70G	375-512	58	5/8	3	300	Price list
CK - 70G2	Base CM, 2, 2 varillas CM-70 y CM-70G					Price list

BASE CK

Cutting Charts (mm/MHz)

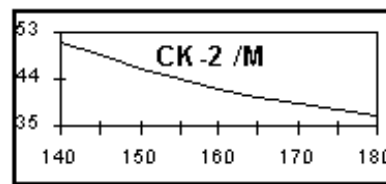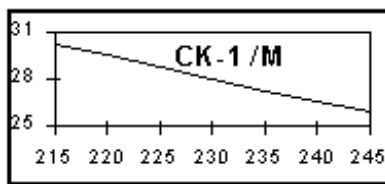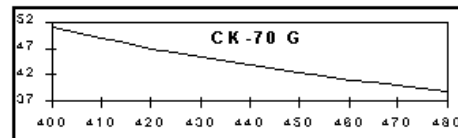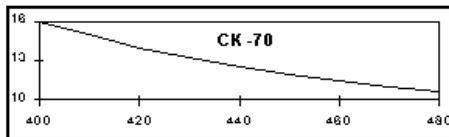

R.O.E

