


Gainflex



PI-2 G

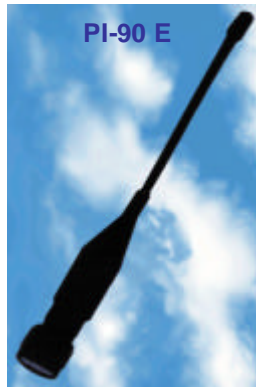

PI-90 E



PI-70

PORTABLE ANTENNAS

DESCRIPTION



- Gainflex for PMR.
- Wide band antennas.
- Copper plated steel radiator with dipping.
- Pre-tuned option.
- Standard male connectors: BNC, TNC, PL.
- Also available with: N, SMA, etc.
- Suitable for TETRA.
- Gainflex 800, 900 MHz, suitable for TETRA, ETACS, GSM, ARCE, AMPS.

SPECIFICATIONS

- Polarization Vertical
- Radiation Omnidirectional
- Impedance 50 Ohms
- Max. Power 25 W

DESCRIPCION




- Antenas gainflex para radioteléfonos portátiles.
- Antenas de banda ancha.
- Radiante en acero cobreado, recubierto en dipping o termoretráctil.
- Conectores standard (macho): BNC, TNC, PL.
- Posibilidad de otros conectores: N, SMA, etc.
- Posibilidad de ajuste, bajo pedido.
- Aptas para sistema TETRA.
- Gainflex 800, 900 MHz, aptos para sistemas TETRA, ETACS, GSM, ARCE, AMPS, etc.



ESPECIFICACIONES

- Polarización Vertical
- Radiación Omnidireccional
- Impedancia 50 Ohms
- Potencia Max. 25 W

Cutting Charts (mm/MHz)

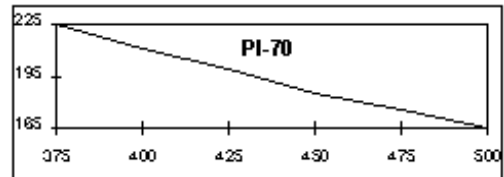

R.O.E

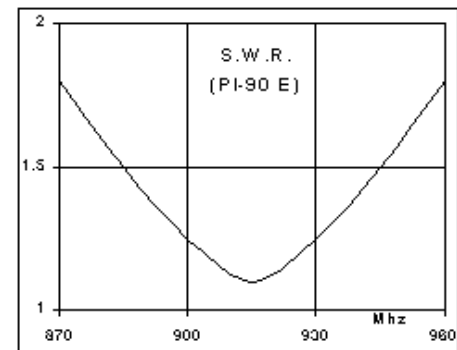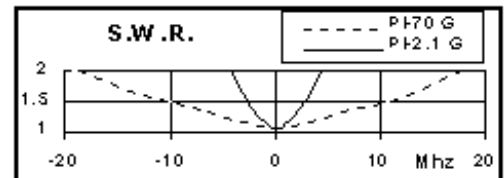

Models	Frequency (MHz)	Length (cm)	Type	Gain (dbd)	Weight (gr)	Price (Euros)
PI - 2G	134-174	50	1/2	0	200	Price list
PI - 1G	220-240	45	1/2	0	200	Price list
PI - 70	375-512	23	1/4	< 0	35	Price list
PI - 70G	375-512	37	1/2	0	102	Price list
PI - 80 E	800-895	19	1/2	0	50	Price list
PI - 90 E	870-960	17	1/2	0	40	Price list